BeautyBeauty

Moonn Electronics

Use me to build a clone of the Ruby by Devi Ever

Hi there!
Thank you for building me!

VroomVroom Babyy!

If you have any questions or anything else to say, just write an email to
moonnelectronics@gmail.com

Have a nice day!

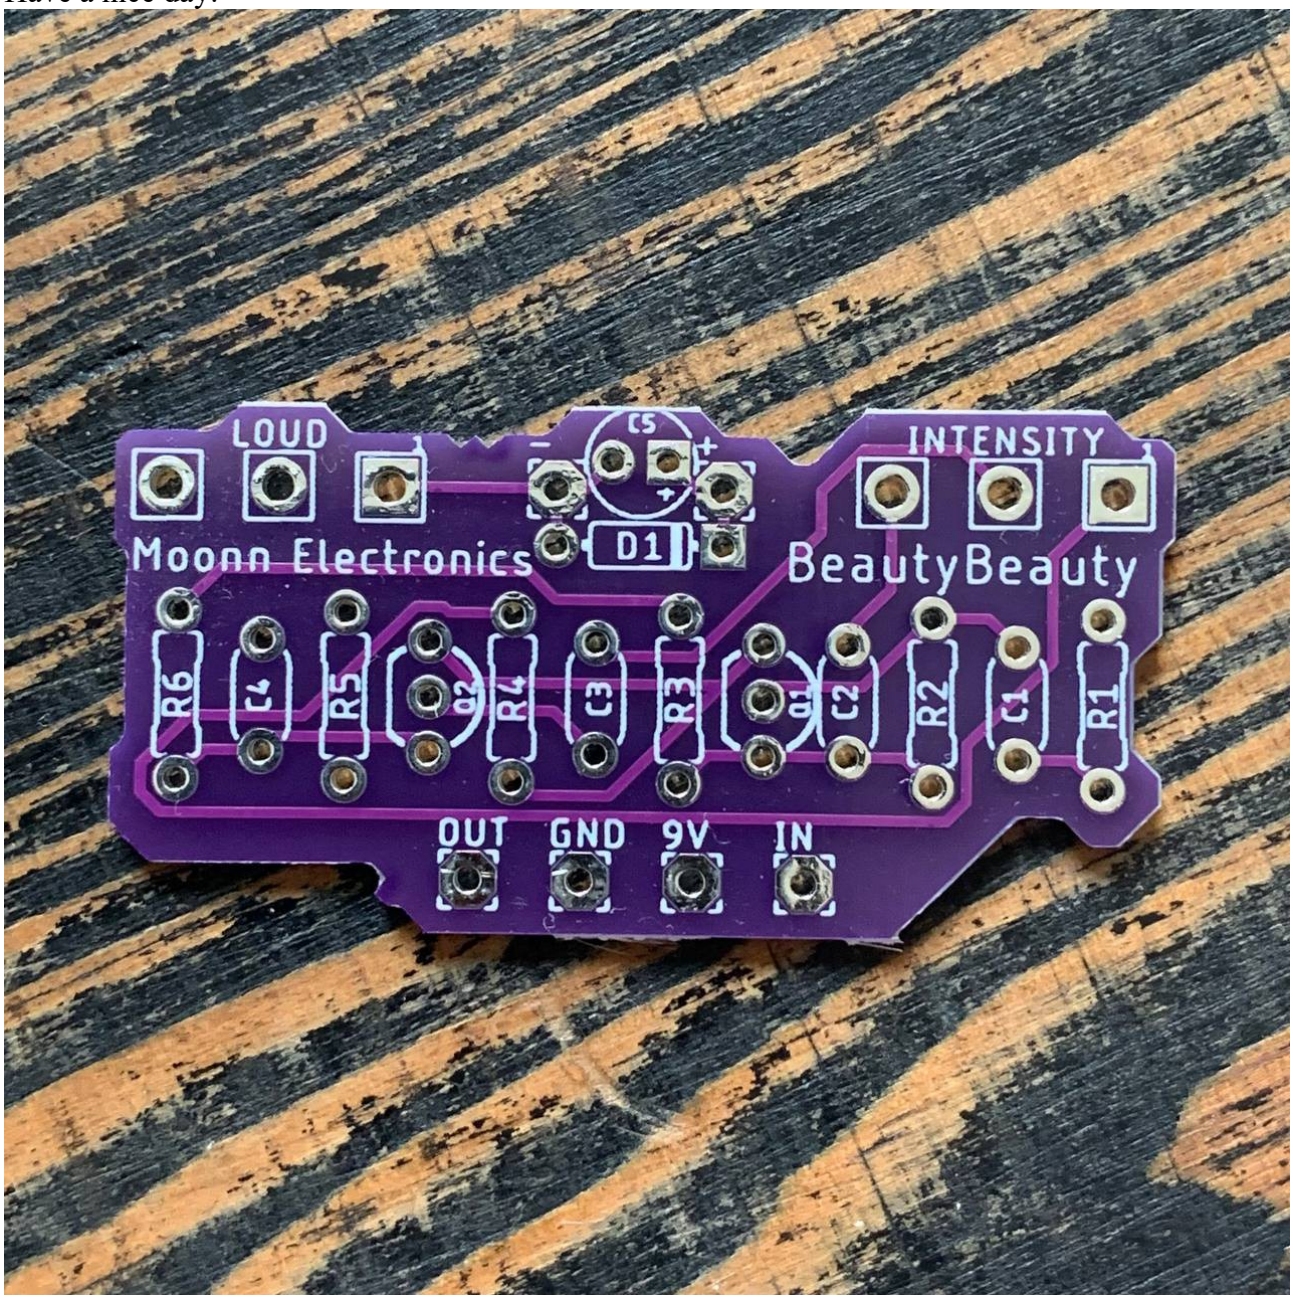

Moonn Electronics is in no way affiliated with Devi Ever

Bill of Materials

Qty	Value	Parts
Resistors		
1	1K	R4
2	10K	R3, R6
1	1M	R1
2	2M2	R2, R5
Film Capacitors		
2	10n	C1, C2
2	100n	C3, C4
Electrolytic Capacitors		
1	100u	C5
Semiconductors		
1	1N4001	D1
2	MPSA18	Q1, Q2
Potentiometers		
1	A100K	LOUD
1	B100K	INTENSITY

Schematic

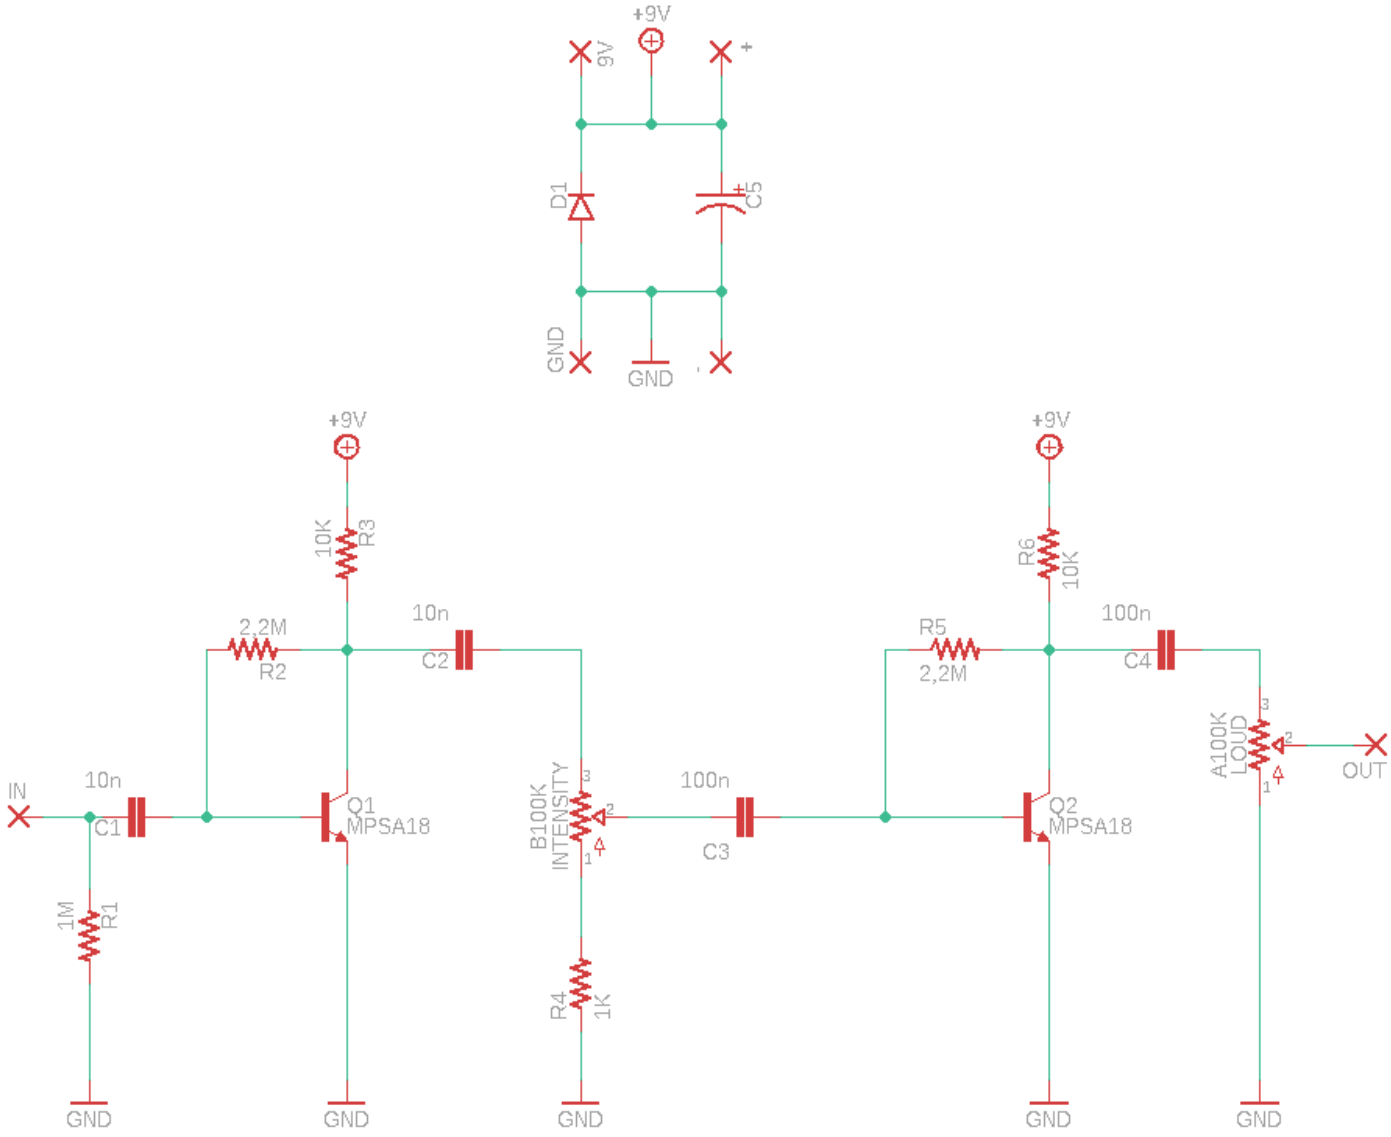
+9V
9V
+
D1
C5
GND
GND
-
+9V
10K
R3
2,2M
R2
10n
C2
IN
10n
C1
Q1
MPSA18
1M
R1
GND
GND
B100K
INTENSITY
R4
1K
GND
100n
C3
+9V
R6
10K
R5
2,2M
100n
C4
Q2
MPSA18
GND
A100K
LOUD
OUT
GND

Offboard Wiring